

# BETALINE

Technical data pages by Formrack

Betaline 19" Free Standing Rack  
Cabinet Reference Rack:600x600

**FORMRACK®**



## General Features

- Betaline cabinets have four side openable, lockable and easily removable covers.
- The rear and side covers are made by DKP sheet and the front side is made by 4 mm thick, impact-resistant, tempered and smoked-colored glass which is supported by metal frames.
- The frame and corner profiles have screwed structure at the exterior surface
- Ventilation can be provided by cooling units with 2 or 4 fans.
- 12U , 16U , 20U , 26U , 32U , 36U , 42U and 47U height options.
- There are four 19" mounting profiles which can be adjusted in depth according to the need in the cabinet
- Mounting profiles have U markings that facilitate the mounting process.
- At the bottom part of the cabinets, there is a sliding and dust-protected brushed cable entry. These entries are available in two locations, from bottom to top.
- Painted by impact-resistant, high strength, electrostatic Ral 9005 texture black color or Ral 7035 gray.
- All test procedures have been carried out and has RoHS, CE, EN 61587-1 standards.

## Technical Descriptions

|                        |   |
|------------------------|---|
| Dimensions W*D         | : W:600 mm D:600 mm   |
| Available U - Sizes    | : 12U / 16U / 20U / 26U / 32U / 36U / 42U / 47U   |
| Paint Type             | : Electrostatic powder paint  |
| Standarts              | : In accordance with the standard TS EN IEC 61587-1: 2022 / ISO9001-2015 / ISO14001-2015 / ISO 45001-2018 / ISO 27001:2017 / RoHS / UL 2416 |
| Material               | : Sheet Steel, DIN EN 1030-99 / DC-01 6112 / DC-7122  |
| Load Carrying Capacity | : 800kg / 1 763.69lbs   |
| IP rating              | : IP20  |
| Available Colors       | : Ral 9005 Black / Ral 7035 Light Gray (Contact your sales representative for different colors)   |

### FORMRACK

Address: Akcaburgaz Mah. 592. Sokak No:10 B Blok 34522 Esenyurt - İstanbul - Türkiye  
T: +90 212 565 56 50 / F: +90 212 567 40 46 [www.formrack.com](http://www.formrack.com) / [sales@formrack.com](mailto:sales@formrack.com)

BETALINE

# BETALINE

Technical data pages by Formrack

Betaline 19" Free Standing Rack  
Cabinet Reference Rack:600x600

**FORMRACK®**



■ RAL 9005



■ RAL 7035



## DOORS


### Front Doors



Double Glass Door



Single Glass Door

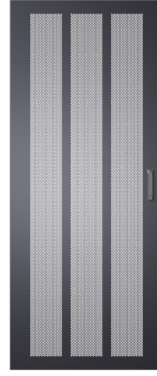


Single Perforated Door



Double Perforated Door


### Rear Doors



Single Solid Metal Door



Double Solid Metal Door

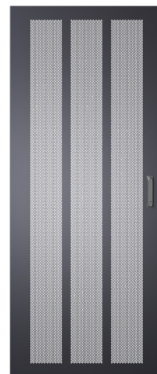

Single Perforated Door



Double Perforated Door

## FORMRACK

Address: Akcaburgaz Mah. 592. Sokak No:10 B Blok 34522 Esenyurt - İstanbul - Türkiye  
T: +90 212 565 56 50 / F: +90 212 567 40 46 [www.formrack.com](http://www.formrack.com) / [sales@formrack.com](mailto:sales@formrack.com)

BETALINE


# BETALINE

Technical data pages by Formrack

Betaline 19" Free Standing Rack  
Cabinet Reference Rack:600x600

**FORMRACK®**

## Exploded View

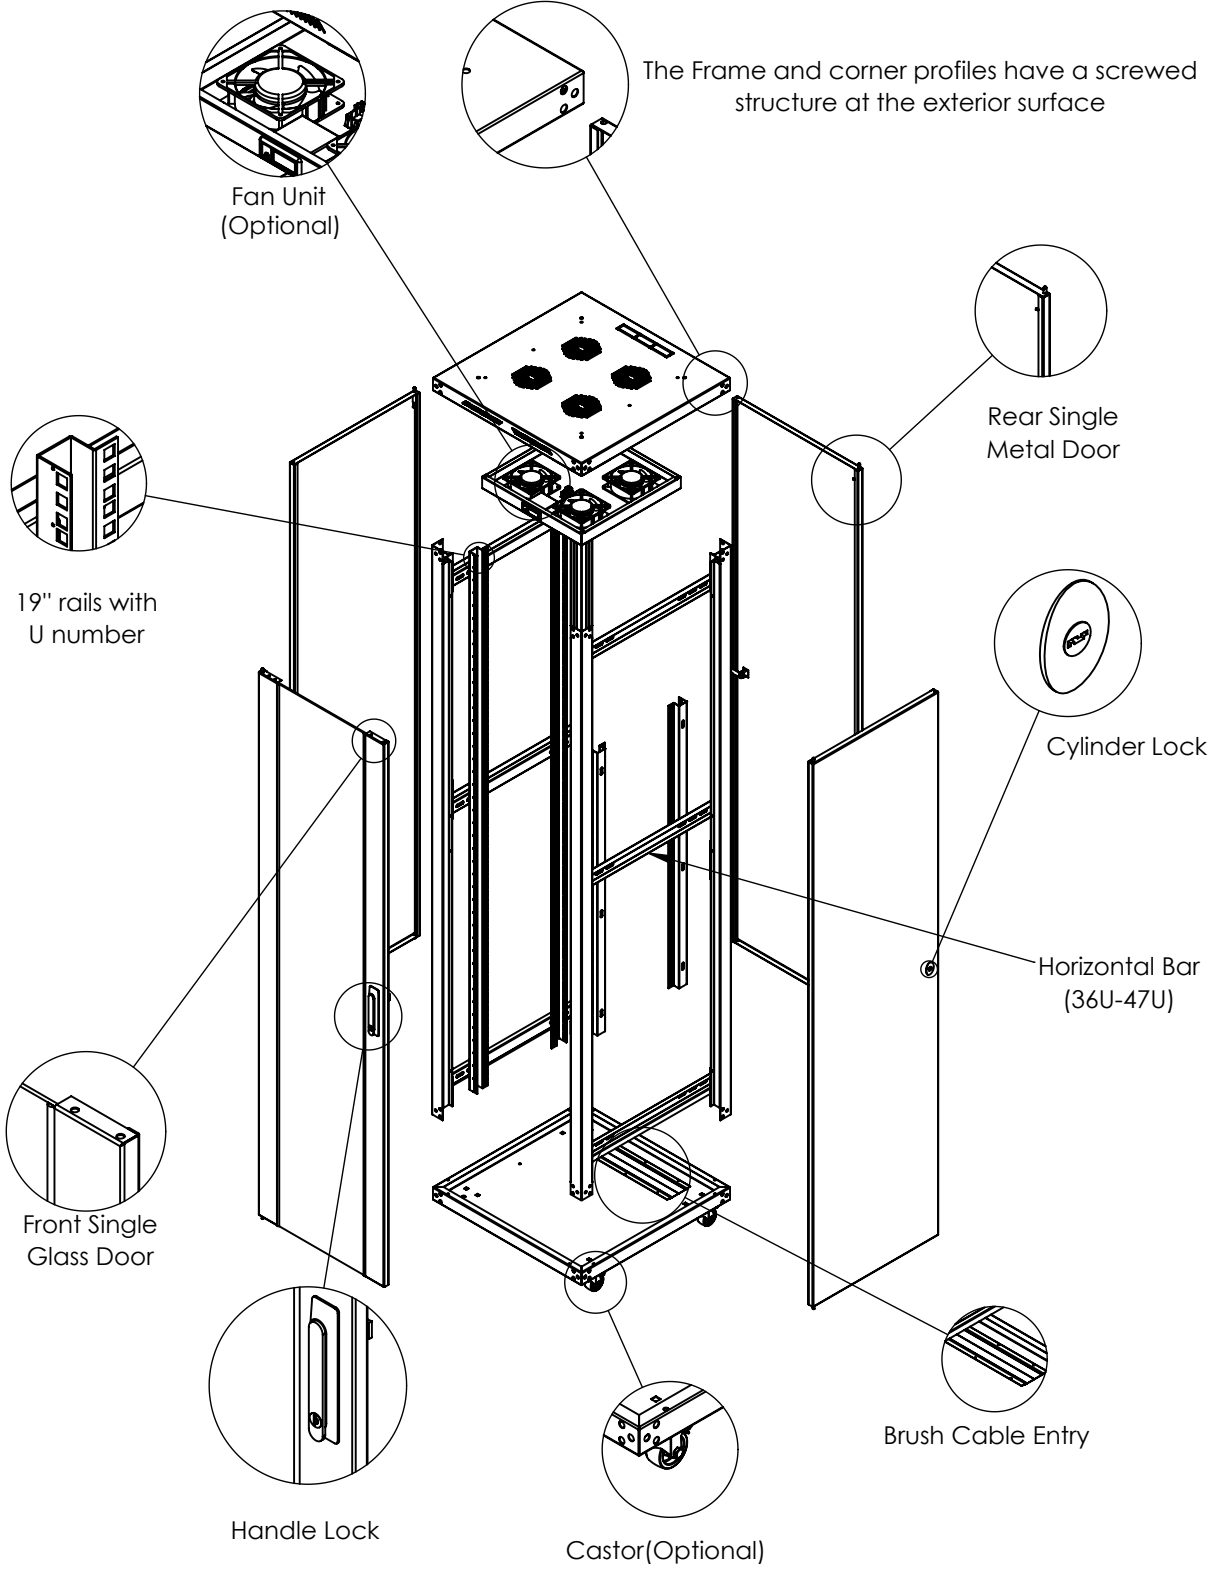

### FORMRACK


Address: Akcaburgaz Mah. 592. Sokak No:10 B Blok 34522 Esenyurt - İstanbul - Türkiye  
T: +90 212 565 56 50 / F: +90 212 567 40 46 [www.formrack.com](http://www.formrack.com) / [sales@formrack.com](mailto:sales@formrack.com)

# BETALINE

Technical data pages by Formrack

Betaline 19" Free Standing Rack  
Cabinet Reference Rack:600x600

**FORMRACK®**

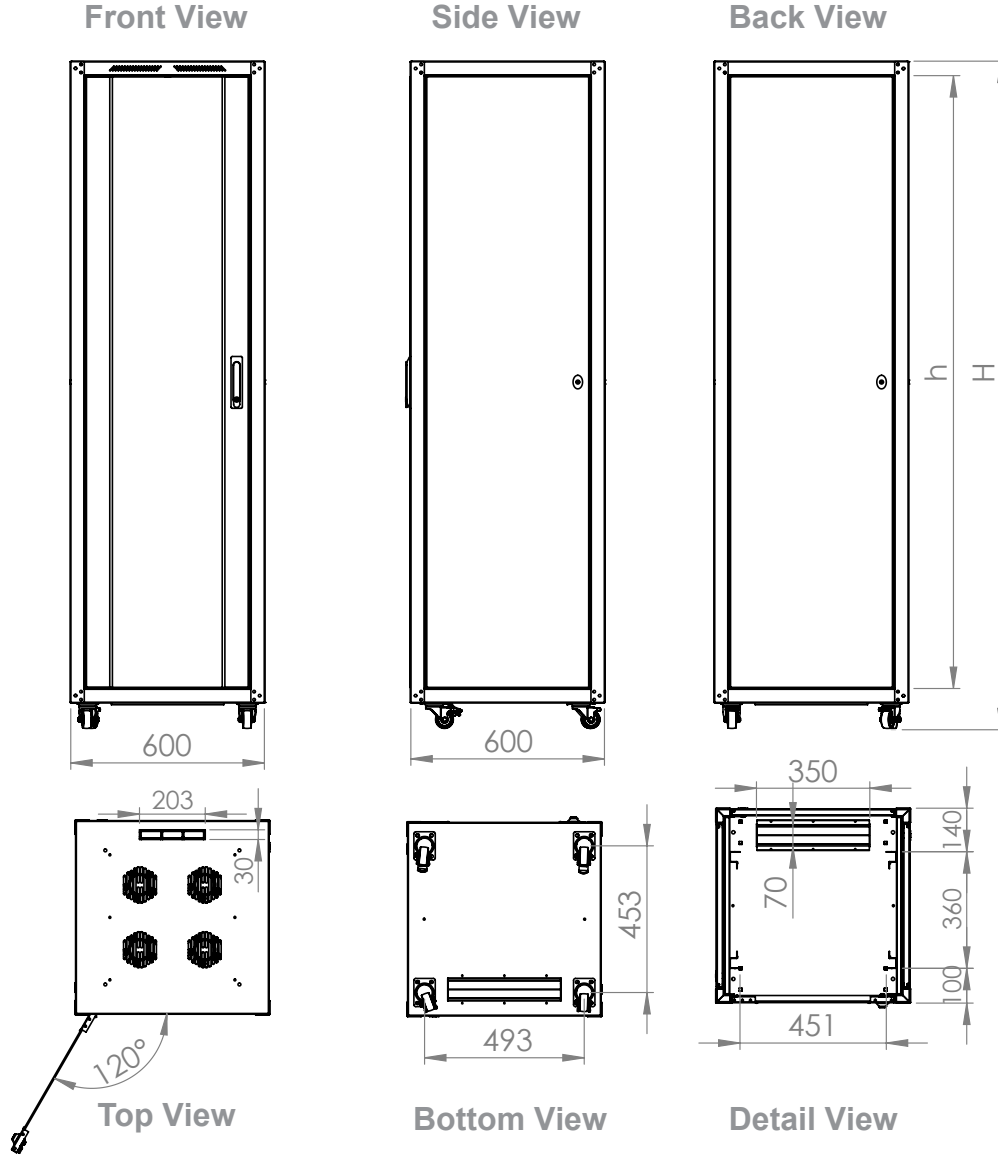

| Product Number    | Product Name                               | Dimensions (WxDxH) (mm) | U  | H (mm) | h (mm) | Weight (kg) |
|-------------------|--|-------------------------|----|--------|--------|-------------|
| FORM BETA-12U6060 | 12U 600x600 BETALINE FREE STANDING CABINET | 600x600x764             | 12 | 764    | 536    | 31          |
| FORM BETA-16U6060 | 16U 600x600 BETALINE FREE STANDING CABINET | 600x600x940             | 16 | 940    | 714    | 37          |
| FORM BETA-20U6060 | 20U 600x600 BETALINE FREE STANDING CABINET | 600x600x1118            | 20 | 1118   | 892    | 42          |
| FORM BETA-26U6060 | 26U 600x600 BETALINE FREE STANDING CABINET | 600x600x1384            | 26 | 1384   | 1158   | 51          |
| FORM BETA-32U6060 | 32U 600x600 BETALINE FREE STANDING CABINET | 600x600x1651            | 32 | 1651   | 1425   | 60          |
| FORM BETA-36U6060 | 36U 600x600 BETALINE FREE STANDING CABINET | 600x600x1829            | 36 | 1829   | 1603   | 67          |
| FORM BETA-42U6060 | 42U 600x600 BETALINE FREE STANDING CABINET | 600x600x2096            | 42 | 2096   | 1870   | 74          |
| FORM BETA-47U6060 | 47U 600x600 BETALINE FREE STANDING CABINET | 600x600x2318            | 47 | 2318   | 2092   | 83          |

**FORMRACK**

Address: Akcaburgaz Mah. 592. Sokak No:10 B Blok 34522 Esenyurt - İstanbul - Türkiye  
T: +90 212 565 56 50 / F: +90 212 567 40 46 [www.formrack.com](http://www.formrack.com) / [sales@formrack.com](mailto:sales@formrack.com)

BETALINE

## STANDARDS

### PROTECTION INDEX

- IP20 According to TS 3033 EN 60529
- IP20 :Rigid test rod diameter of 12 mm, 80 mm long (as specified by the standard) is pushed against any openings of the enclosure with the force of 10N

### MECHANICAL PERFORAMANCE

- EN 61587-1 5.2.1 / 5.2.3
- Static mechanical load test (Performance level SL06)
- Resonance point detection test IEC 60068-2-6
- Rolling Test (TS EN IEC 61587-1)
- Vibration test (IEC 60068-2-6)
- Shock test IEC 60068-2-27)
- Permissible load carrying capacity : 1200kg

### CLIMATIC TESTS (Performance level C2)

- Cold (IEC 60068-2-1) Temperature of the exposure: -25°C +/-3°C
- Dry heat (IEC 60068-2-2) Temperature of the exposure: +70°C +/-2°C
- Damp heat cyclic (IEC 60068-2-30)

### INDUSTRIAL ATMOSPHERE (Performance level A2)

- Sulphur dioxide test and hydrogen sulphide test IEC 60068-2-42, IEC 60068-2-43, IEC 60068-2-49

### GROUNDING CONTINUITY

EN 61587-1 / EN 61010-1

The continuity of the protection circuit is in accordance with the standard regulations, measured resistance was less than 0.1 Ohm.

**SHEET METAL:** TS EN ISO 9001:2008; TS EN 10130 :2006; DIN EN 1030- EQV; BS EN 1030-EQV; NF A36-401.

**ELECTROSTATIC POWDER PAINT:** ISO 9001:2015 ASTM D523; ASTM D2794; DIN EN ISO 2811-1; ASTM D1186/D1400; Ral:9005 or Ral:7035.

**VENTILATION UNITS** ( Fan Unit ) TS EN 62368-1:2020 — AC:2020 — A11:2020

**TEMPERED SAFETY GLASS** " EN 12150 – 2 Glass, Tempered, secure " Mechanical strength test result: Bending strength minimum 120 N/ mm<sup>2</sup>

**CONNECTION COMPONENTS** (screw, nut, washer etc.)" TS EN ISO 7045; TS EN ISO 4032; RoHS IEC 62321 "

**WHEEL SET** " TS EN 12532 , TS EN 12533 , RoHS IEC 62321:2008"

**LOCKS SYSTEMS** "DIN-EN ISO 1043-1 PA6 GFR 30; DIN-EN 1774-ZnAl4Cu1.